

# SWIWIN SW300Pro-K

## Technical specifications

(A/0)



## SWIWIN SW300Pro-K List of engine accessories

Serial number	Name	Picture specification	Quantity
1	Engine		one
2	ECU (V4)		one
3	GSU		one
4	Fixture		one
5	Power cable		one
6	Signal cable		one
7	Switch valve		one



8	FESTO filter		one
9	Tubing	 $\Phi 4 \times \Phi 2.5\text{mm}$ $\Phi 6 \times \Phi 4\text{mm}$	1.5m

## Technical parameter

Model	SW300Pro-K
Thrust	30kg
Diameter (mm)	132mm
Length (mm)	333mm
Weight	2560g
ECU weight	380g
Total weight (including accessories)	3420g
Usage temperature	-40°C~50°C
Supply voltage	6S Lipo battery
Starting system	One-button electronic start
Rpm Range	38000-98000
Exhaust Temperature	750°C
Fuel Consumption	820g/min
Fuel	kerosene
Lube oil	3%~5%
Maintenance Interval	25H
Start time	≤30s

Note:For engines purchased before 2025, please contact the after-sales service team to confirm the compatible starting power supply battery model to ensure that your engine can be matched with the optimal starting power supply model.

## Engine start parameters

Pump Voltage	1.34V
RPM Start Up Ramp	80%
Pump Start Up Ramp	7
Glow Plug	5-7V
Valve	50
Ignition RPM	3000
Preheat RPM	8000
RPM Off Starter	18000

## Engine operating parameters

RPM ACC	25
RPM DEC	25
Max RPM	98000
Idle RPM	38000
Minimum speed	18000
Max Temp	1000
Low Volt	10V
Restart	close
Restart Glow Plug	Consistent with the voltage of the burner
Pump Limit	15V

## Engine cooling parameters

Cool	4000rpm
------	---------

---

## Starting motor parameters

Pop-up time	0.4S
-------------	------

---

Ejection voltage	4V
------------------	----

---


Run Voltage	5V
-------------	----

---

Note: All data are measured at standard air pressure.


When the ambient temperature is too high or the oxygen content in the air is low, too fast acceleration and deceleration will easily lead to flameout failure.

## System connection diagram

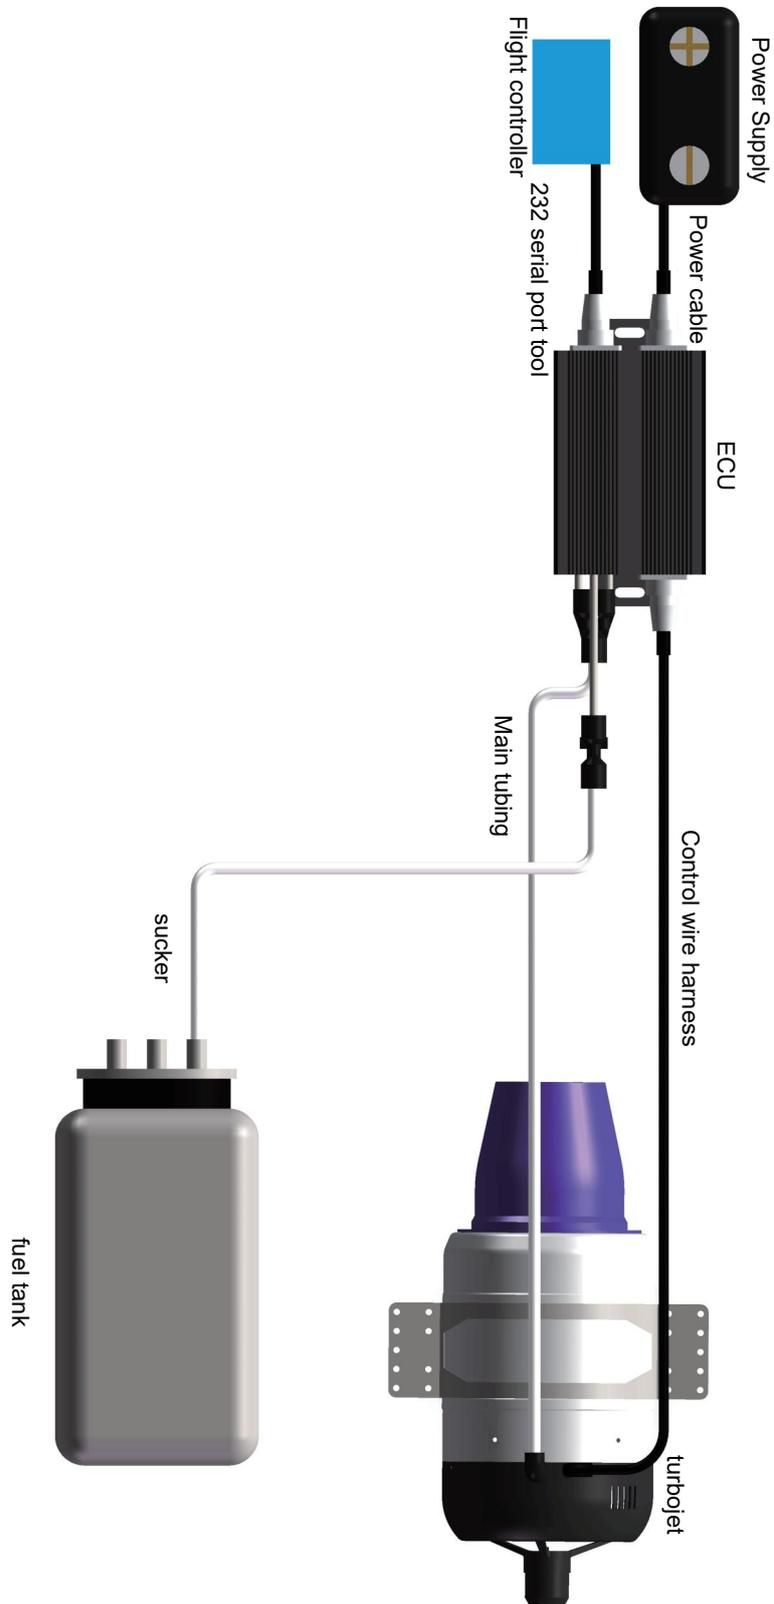



### Product dimension diagram

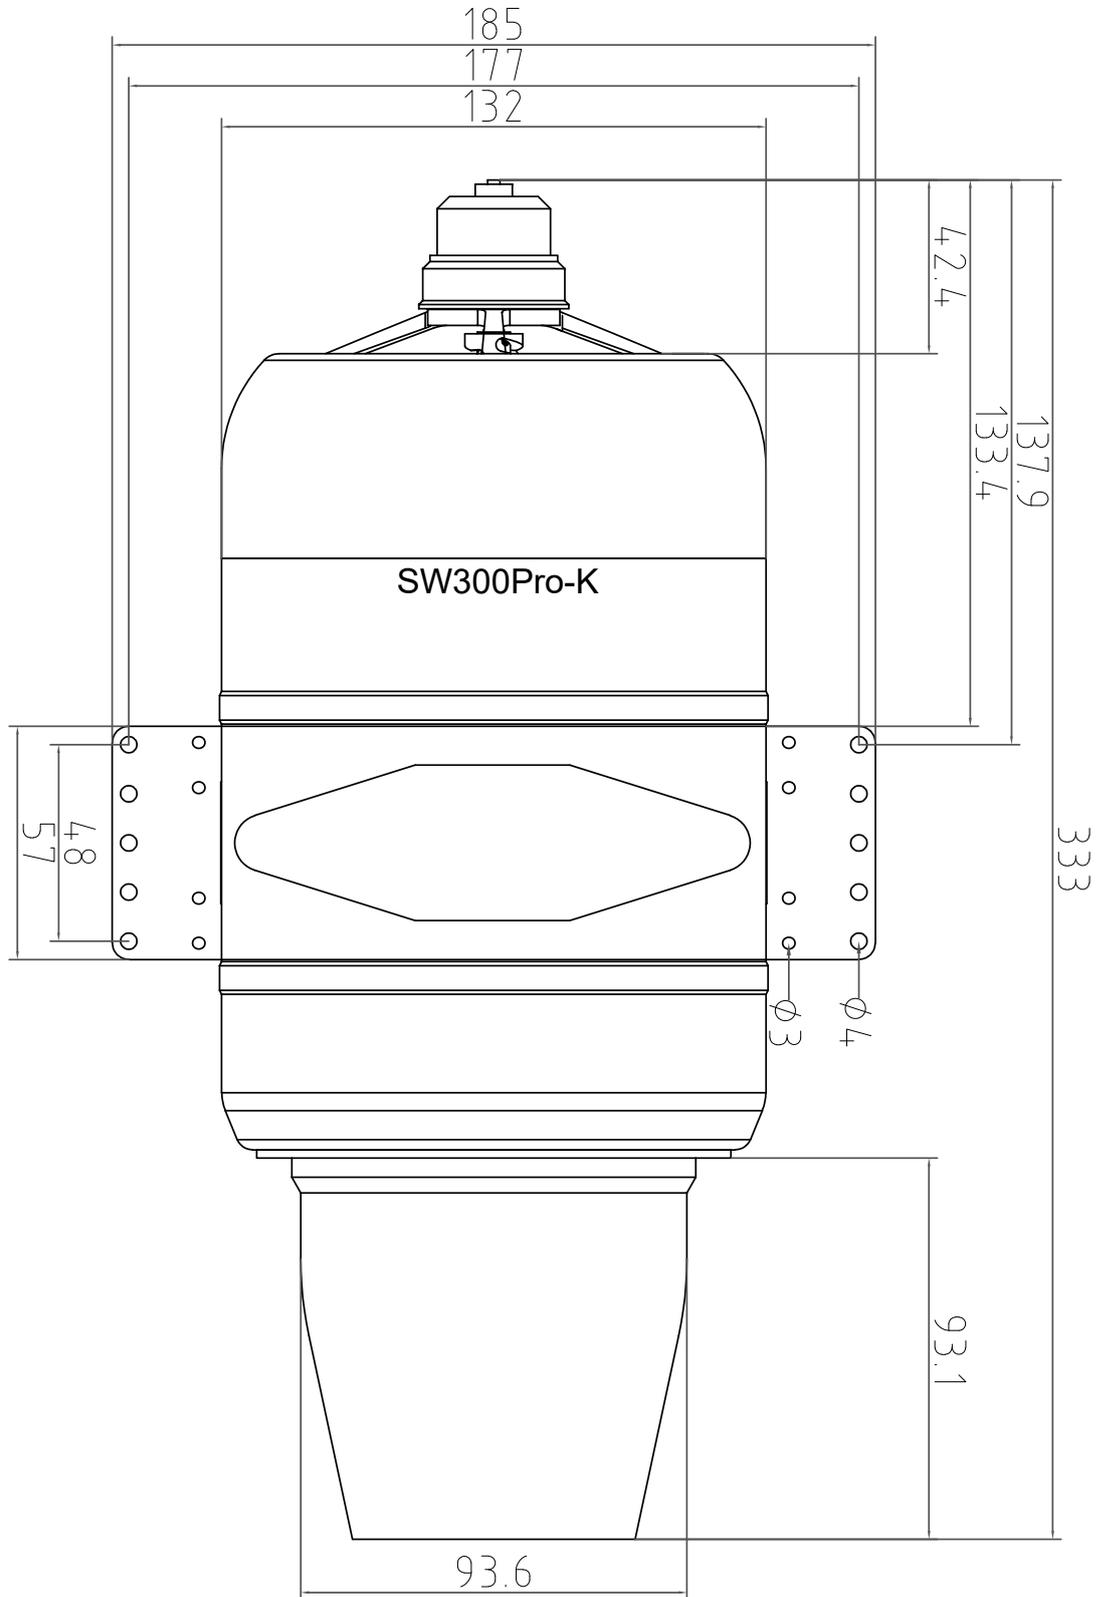

## Disclaimer

This product is limited to use in entertainment and civil fields such as aerial model toy flying, competitions, performances, firefighting, road drying and cleaning.

Please strictly follow the provisions of the Export Control Law of People's Republic of China (PRC). It is strictly forbidden to modify the product for illegal use. It is strictly prohibited to resell the product to the export restriction country under the law in china.

Otherwise, all consequences will be at your own risk.